



1-Score Shotblast


CONCRETE MASONRY UNITS




4x8x16
1-Score 1-Side




6x8x16
1-Score 1-Side




8x8x16
1-Score 1-Side




10x8x16
1-Score 1-Side



12x8x16
1-Score 1-Side




16x8x16 Ring
1-Score 1-Side



16x8x16 Double Open End
1-Score 1-Side

1-Score
Running Bond

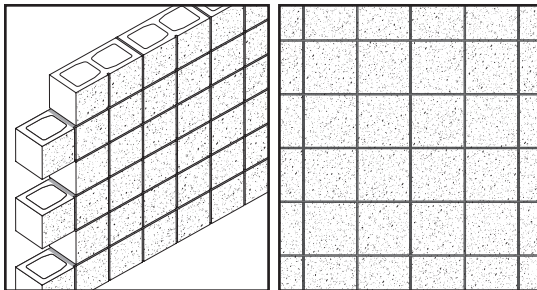

Score exposure depth can vary with normal manufacturing and texturing. Degree of texturing of Shotblast units will vary from unit to unit.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:
11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com

Features

A single vertical score mid-length, 3/8-in wide and deep, simulates a raked joint. For typical cmu with an 8-in by 16-in face, the effect is a grid of 8x8 squares that can effectively add accent or interest to the elevation.

The Shotblast texture roughens the surface and removes sharp edges.

Availability

Special order only. Scores on two sides and Shotblast on multiple faces are available. Configurations such as open ends and open end bond beams are available. Units may be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

CarbonKind™
by Angelus Block

This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at Angelus Block/CarbonKind.



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.