




1-Score Split Face




4x8x16
1-Score Split 1-Side




6x8x16
1-Score Split 1-Side



8x8x16
1-Score Split 1-Side




10x8x16
1-Score Split 1-Side



12x8x16
1-Score Split 1-Side

1-Score Split
Face
Running Bond

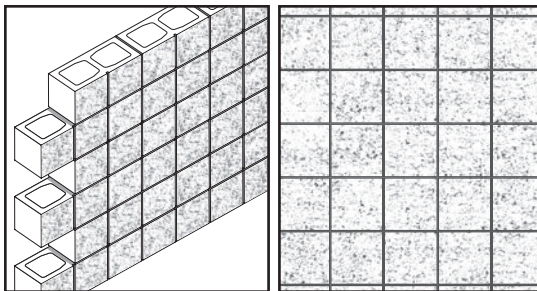

Score alignment and exposure depth can vary with normal manufacturing. Aggregate exposure in all scored split units will vary across the unit face, but is not discernable when viewing the overall field.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com

Features

A single vertical score mid-length, 3/8-in wide and deep, simulates a raked joint. For typical cmu with an 8-in by 16-in face, the effect is a grid of 8x8 squares that can effectively add accent or interest to the elevation. Split faces reveal the aggregate matrix for a roughhewn, natural look.

Availability

Special order only. Units are available in closed end, open end, and bond beam configurations, and with scores on two sides. Other widths may be available. All units can be made in any of our integral color options on special order.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at Angelus Block/CarbonKind.



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.