



# 2-Score Shotblast CMU


CONCRETE MASONRY UNITS



**8x8x16 2-Score**  
Special order.



**10x8x16 2-Score**  
Special order.



**12x8x16 2-Score**  
Special order.

## Features

Two vertical scores, 3/8-in wide and deep, simulate raked joints, and visually divide the face into three sections. The effect is a grid that can effectively add accent or interest to the elevation.

The Shotblast texture roughens the surface and removes sharp edges.

## Availability

**Special order only.** Shotblast on multiple sides is available. Configurations such as open ends and open end bond beams may be available. May be limited in plant location. Units can be made in any of our integral color options.

## Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

## Fire Rating


Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

## Sustainable Features


- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at [www.AngelusBlock.com](http://www.AngelusBlock.com).

2-Score  
Running Bond

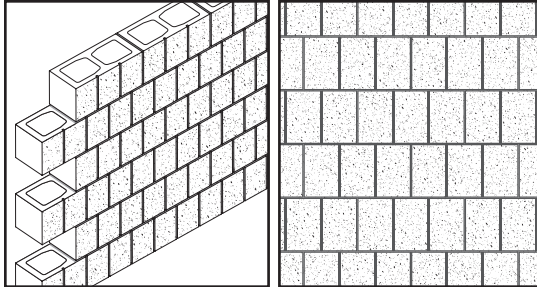

2-Score  
Stack Bond

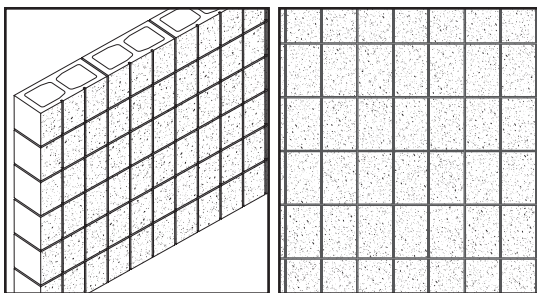

Degree of texturing of Shotblast units will vary from unit to unit.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.  
Sun Valley, CA 91352  
(818) 767-8576

Orange, CA  
Fontana, CA  
Gardena, CA

Oxnard, CA  
Indio, CA  
Bakersfield, CA

[www.AngelusBlock.com](http://www.AngelusBlock.com)

[info@AngelusBlock.com](mailto:info@AngelusBlock.com)



This is a low impact CarbonKind™ product which substantially reduces CO<sub>2</sub>e. Learn more at [AngelusBlock/CarbonKind](http://AngelusBlock/CarbonKind).



**WARNING:** This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).