



4-Score Split Face


CONCRETE MASONRY UNITS




8x8x16
4-Score Split 1-Side



10x8x16
4-Score Split 1-Side
May be limited in plant location.



12x8x16
4-Score Split 1-Side



16x8x16 Ring
4-Score Split 1-Side

Features

Deep, narrow scores and a projected split face provide mass and accent with the character of inlaid stone.

Add relief and depth of texture to fields and bands; create visual anchoring to lower elevations or striking accent to top of walls.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. Multiple-sided units are available. Units can be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating


Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

4-Score Split Running Bond

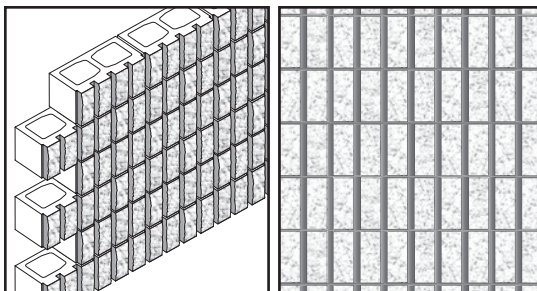

*Depth may differ by plant. Aggregate exposure in all deep scored and fluted units will vary across the unit face, but is not discernable when viewing the entire field.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St. Orange, CA
Sun Valley, CA 91352 Fontana, CA
(818) 767-8576 Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at Angelus Block/CarbonKind.