




Slope Face 1-Inch




8x8x16
Slope Face 1-Inch




12x8x16
Slope Face 1-Inch Open End



8x8x16
Slope Face 1-Inch 1-Side 1-End




12x8x16
Slope Face 1-Inch
Double Open End Bond Beam




12x8x16
Slope Face 1-Inch 1-Side 1-End
Open End

Slope Face 1-in
Running Bond

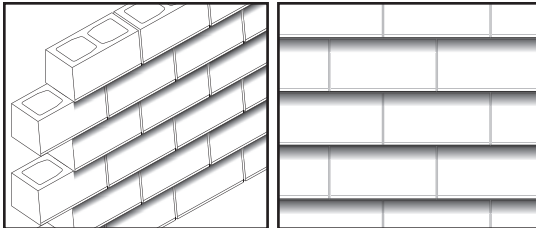

Slope Face 1-in
Stack Bond

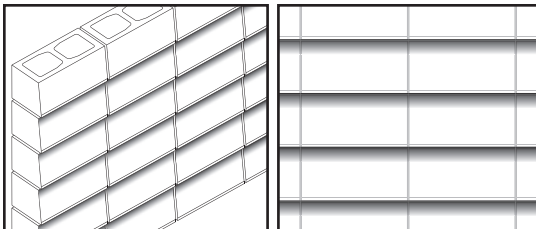

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com

Features

An extra inch in width at the bottom of the Slope Face 1-Inch unit creates a strong horizontal shadow line and a sawtooth side profile.

Availability

Special order only. May be available in open ends and open end bond beams, and may be limited in plant locations. Available in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at Angelus Block/CarbonKind.



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.