




E-Z MIX INC.

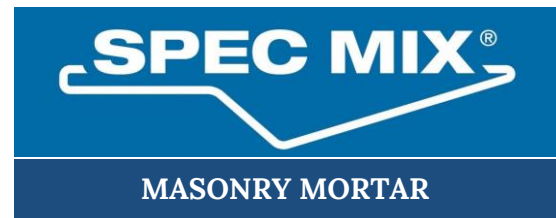

PRODUCT

SPEC MIX® MASONRY MORTARS

DESCRIPTION

SPEC MIX® Masonry Mortar is a dry, factory blended mortar specifically designed for use by masonry contractors. This product is produced under strict quality control guidelines to meet ASTM, IBC and CBC requirements. Spec Mix Masonry Mortar provides a superior product to jobsite mixing due to control of mix ration and quality of sand. It is available in several packaging options to provide savings in handling and mixing. Spec Mix Masonry Mortar is available in the following mix designs as well as special orders for individual job requirements:

- **Type S: (>1800 psi)** cement, lime and sand
- **Type M: (>2500 psi)** cement, lime and sand

USES

SPEC MIX Masonry Mortar is used in the application of block, brick and stone; or whenever a high-quality masonry mortar is required.

COLORS

SPEC MIX Masonry Mortar is also available in preblended colors. Special orders available.

ADVANTAGES

- Quality control – a consistent batch every time
- Convenience of handling and transporting one product
- Excellent for multi-story and difficult access jobs
- Systems that save time and money on labor
- Consistent color quality

PACKAGING

Type S is available in 60 lb. and 94 lb. paper bags, 3000 lb. bulk bags and bulk.

Type M is available in 94 lb. paper bags, 3000 lb. bulk bags and bulk.

Information on silos and bulk systems available upon request.



TECHNICAL DATA

SPEC MIX Masonry mortar, Type S and Type M, are manufactured in accordance with and meet the requirements of current ASTM C270 Mortar for Unit Masonry, ASTM C1714 Preblended Dry Mortar Mix for Unit Masonry, IBC and CBC. It is approved by L>A> City (RR 24968) the State of California Division of the State Architect and for Caltrans projects.

APPLICATIONS

Add SPEC MIX Masonry Mortar to clean potable water and mix to desired consistency. Recommended water is approximately 17-20% by weight. One 94 lb. bag should lay approximately 25 block or 40-50 brick.

LIMITATIONS

- Do not apply when temperature is below or may fall below 40°F prior to curing.
- Do not add any admixtures without prior consent from E-Z Mix, Inc.

WARRANTY

The technical information and usage statement are based on our best knowledge. The content of this specification sheet is presented for information purposes only and do not constitute responsibility for their use. The manufacturer will replace only that material which is proven defective due to quality of the components of the manufacturing process.

CAUTION

Prolonged exposure to dust may cause delayed lung disease. Eliminate exposure to dust. Use NIOSH approved mask for silica dust. Freshly mixed material may cause skin irritation. Avoid direct contact when possible and wash exposed skin areas promptly with water and get prompt medical attention. See Safety Data Sheet.

For technical support contact:

www.ezmixinc.com jjara@ezmixinc.com

Corporate Office:
11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Sun Valley Plant:
11450 Tuxford St.
Sun Valley, CA 91352
(818) 768-0568

Rialto Plant:
3355 Industrial Drive
Rialto, CA 92316
(909) 874-7686



WARNING: This product can expose you to chemicals including Chromium (hexavalent compounds), which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.